



Rubber United

YOUR SUPPLIER OF RUBBER PRODUCTS

Rubber Playground & Gym tile – smooth finish 20mm thickness

II. Ingredients / Identity Information

Major components: Styrene-Butadiene Rubber (SBR) from recycled truck tire
Polyurethane binder

Minor components: Iron Oxide Red/ Green

III. Physical Properties

Appearance: safety rubber tile/mat

Odor: very slight typical rubber product odor

Specific Gravity: 1.3-1.6

-Boiling Point: N/A

Melting Point: N/A

Decomposition Temperature: >250 °C

Vapor Pressure: N/A

Percent Volatile: N/A

Solubility in Water: Insoluble

IV. Fire and Explosion Hazard Data

Flash Point: > 300 °C

Lower Explosion Limit: N/A



Upper Explosion Limit: N/A

Fire Hazard: Flammable / Combustible under high heat and flame.

Can generate toxic and combustible fumes, - carbon monoxide, chlorinated and hydrocarbon compounds, and soot.

Fire Fighting Procedures: Use full protective equipment and SCBA, filter masks, etc.

Extinguishing Media: High expansion foam, water fog and spray.

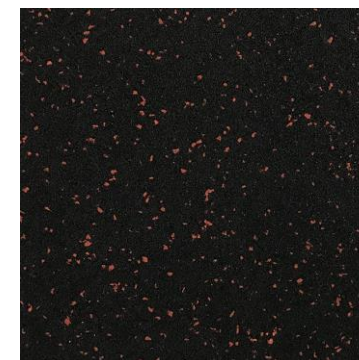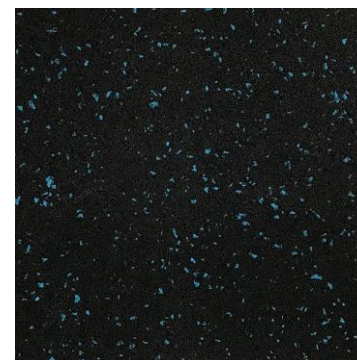

✓ Tiles are 100x100cm – 20mm thickness. Fully flat (no cross) with a smooth finish

✓ Available in:

- ✓ Black
- ✓ Black with 10% EPDM speckles Grey
- ✓ Black with 10% EPDM speckles Blue
- ✓ Black with 10% EPDM speckles Red

✓ Backside has 49 blocks (7x7)

